






BLOOD BANK REFRIGERATED CENTRIFUGE BBRC-206



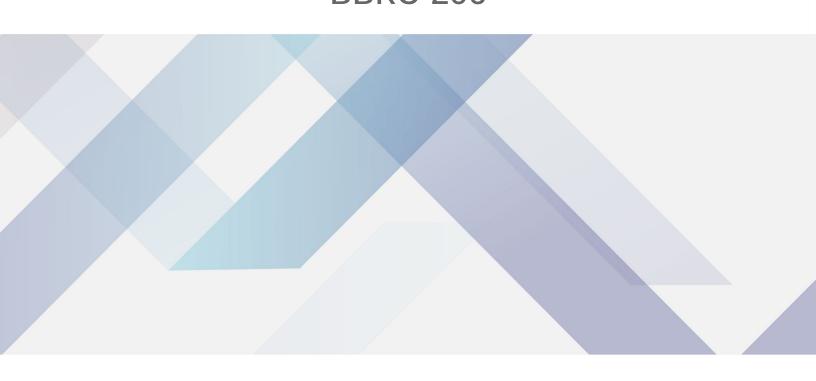

BLOOD BANK REFRIGERATED CENTRIFUGE BBRC-206

Engineered to maximize productivity and reliably deliver a wide range of low speed separations. Stainless steel interiors, integrated refrigeration system and advanced temperature controls make it flexible for your evolving applications. Safety features and low noise operation make it an ideal partner for your day to day separations. Also known as Blood Bank Refrigerated Centrifuge -- 4 bags.

BBRC-206 BLOOD BANK REFRIGERATED CENTRIFUGE



Brushless DC frequency motor with simpler construction, more reliable. performance, longer life and quietly running.

Flexible axle driven system which drive the rotor directly, smooth in operation,low noise.

Imported compressors, fluorine-free, double cycle cooling, cold and hot alternating easily, environment pollution-free and precise in temperature control.

Microprocessor control, digital display in the speed, time, RCF in operation, speed rising and reducing quick, operate simply.

10 kinds of program stored in the memory, 10 kinds of accelerating and decelerating. Automatically electric lid lock, super speed, over temperature protection and imbalance protection. The centrifuge body is made of high quality steel, safe and reliable.

Three layer protection of steel structure, safe and reliable.

SPECIFICATIONS

Model	BBRC-206		
Maximum Capacity (No of tubes x Vol.)	4x800 ml (4 bags)		
Maximum Speed	5000 rpm		
Speed Accuracy	±20rpm		
Maximum RCF	4730xg		
Temperature Range	-20~40°C		
Temperature Accuracy	±1°C		
Time Range	1~9h59min		
Noise Level	≤60 dBA		
Power Supply	AC 220V 50Hz 20A		
Overall Dimension	720x540x830 mm		
Net. Weight	170 kg		
Package	wooden box		

OPTIONAL ACCESSORIES

Accessory Code	Name	Capacity	Max. Speed	Max. RCF
2300710006	Swing Rotor	4x800 ml (4 bags)	4000 rpm	3450xg
2300710007	Swing Rotor	4x500 ml	4000 rpm	3380xg



Biolab Scientific Ltd.